



HIGHLIGHTS

- » Sturdy frame, mounted on highly mobile single-axle trailer
- » Opposing discharge belts for fine and oversized particles save space
- » Ease of transport with a large pickup truck
- » Solid punch plate drum or quick change screening segments available
- » ABS or electric brakes

THE JOKER

The Joker is an entry level hydraulic trommel screen in the world of professional screening technology. Ease of mobility as well as compact and rugged construction are distinguishing features of the Joker.


The Joker is an excellent solution for gardening, landscaping, and smaller composting sites.

Drive	
Diesel engine:	38 kW / 51 HP
Material feeding	
Hopper volume:	> 3 yd ³ / > 2.3 m ³
Screening drum	
Length:	8' 0" / 2400 mm
Diameter:	5' 11" / 1800 mm
Effective screening area:	108 ft ² / 10 m ²
Dimensions	
Transport dimensions	25' 1" x 8' 4" x 12' 6"
L x W x H:	7650 x 2550 x 3800 mm
Throughput (dependent on material)	
Throughput performance:	up to 45 yd ³ /h up to 35 m ³ /h



JOKER

Drum screen

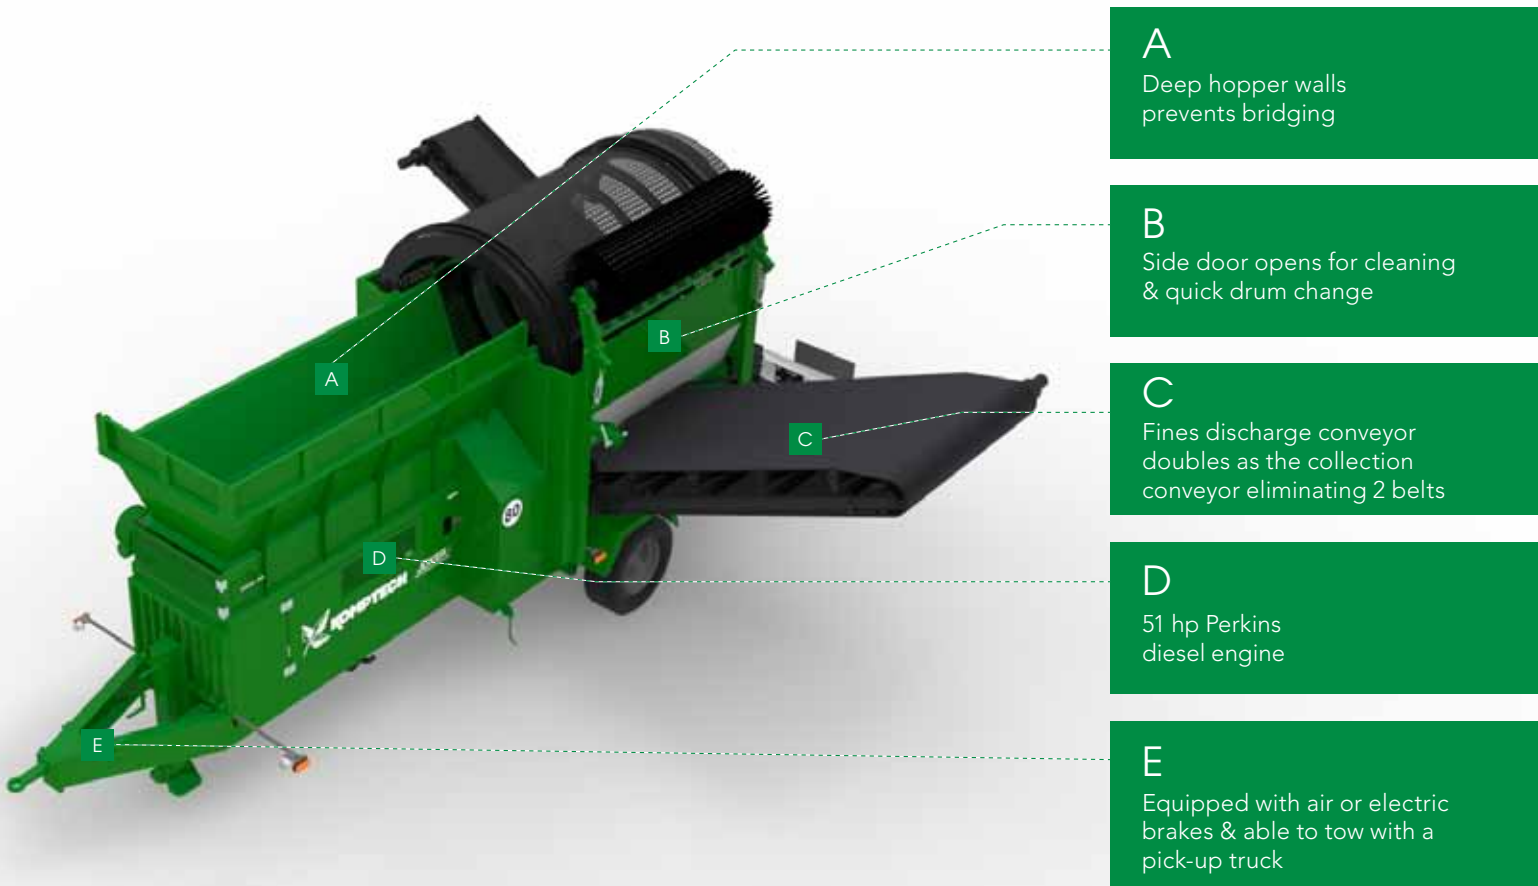

Flexibility

The use of interchangeable screening segments made of highly wear resistant spring steel is particularly beneficial for multi-site use, as different mesh sizes can be transported with the screening machine. The segments are mounted on a core drum with a quick fastener (available for all Komptech drum screens).



Mobility

Small footprint and compact design allow the Joker to be transported almost anywhere.



Accessibility

The screen drum is freely accessible by opening the large side door. To change segments, the drive chain is loosened and the drum lifted out of the machine with suitable lifting gear.