


	Joker	Primus	Nemus 2700	Cribus 2800	Cribus 3800	Cribus 5000
<b>Drive</b>						
Diesel generator / engine (kVA / HP):	51	51	90	60 / 80	60 / 80	60 / 80
<b>Material feeding - feed hopper</b>						
Hopper volume:	> 3.0 yd <sup>3</sup> > 2.3 m <sup>3</sup>	> 4.0 yd <sup>3</sup> > 3 m <sup>3</sup>	> 6.5 yd <sup>3</sup> > 5.0 m <sup>3</sup>	> 6.6 yd <sup>3</sup> > 5.0 m <sup>3</sup>	> 6.6 yd <sup>3</sup> > 5.0 m <sup>3</sup>	> 7.9 yd <sup>3</sup> > 6.0 m <sup>3</sup>
Filling length:	> 8'6" > 2635 mm	> 13'1" > 4000 mm	> 13'1" > 4000 mm	> 13'1" > 4000 mm	> 13'1" > 4000 mm	> 14'9" > 4500 mm
Filling height:	7'9" 2350 mm	> 8'8" > 2640 mm	9'4" 2850 mm	9'8" 2950 mm	9'8" 2950 mm	9'8" 2950 mm
<b>Screening drum</b>						
Diameter:	5'11" 1800 mm	4'9" 1450 mm	6'7" 2000 mm	7'3" 2200 mm	7'3" 2200 mm	7'3" 2200 mm
Length:	8'0" 2440 mm	13'1" 4000 mm	18'1" 5500 mm	15'1" 4600 mm	19'8" 6000 mm	25'3" 7700 mm
Effective screening area:	108 ft <sup>2</sup> 10 m <sup>2</sup>	172 ft <sup>2</sup> 16 m <sup>2</sup>	323 ft <sup>2</sup> 30 m <sup>2</sup>	301 ft <sup>2</sup> 28 m <sup>2</sup>	409 ft <sup>2</sup> 38 m <sup>2</sup>	538 ft <sup>2</sup> 50 m <sup>2</sup>
Drum rpm:	max. 14	max. 21	max. 23	max. 20	max. 20	max. 20
<b>Material discharge - max discharge height</b>						
Coarse fraction:	7'0" 2125 mm	7'7" 2300 mm	11'8" 3550 mm	11'6" 3500 mm	11'6" 3500 mm	11'6" 3500 mm
Fine fraction:	7'11" 2420 mm	6'10" 2080 mm	11'8" 3552 mm	11'0" 3350 mm	11'0" 3350 mm	11'0" 3350 mm
<b>Transport dimensions L x W x H</b>						
Transport dimensions Pintle:	25'1" x 8'4" x 12'6" 7650 x 2550 x 3800 mm	32'0" x 8'4" x 13'1" 9750 x 2550 x 4000 mm	39'4" x 8'4" x 13'1" 12000 x 2550 x 4000 mm	34'9" x 8'4" x 13'1" 10600 x 2550 x 4000 mm	39'4" x 8'4" x 13'1" 12000 x 2550 x 4000 mm	46'1" x 8'4" x 13'1" 13600 x 2550 x 4000 mm
Transport dimensions King-Pin:			37'11" x 8'4" x 13'1" 11552 x 2550 x 4000 mm	32'4" x 8'4" x 13'1" 9850 x 2550 x 4000 mm	38'1" x 8'4" x 13'1" 11600 x 2550 x 4000 mm	46'1" x 8'4" x 13'1" 14040 x 2550 x 4000 mm
Working dimensions Pintle:	24'10" x 20'0" x 10'3" 7580 x 6100 x 3120 mm	38'1" x 19'11" x 9'10" 11613 x 6073 x 3001 mm	51'9" x 21'1" x 12'6" 15762 x 6415 x 3797 mm	42'10" x 16'5" x 13'1" 13060 x 5000 x 4000 mm	53'6" x 21'6" x 13'1" 16300 x 6560 x 4000 mm	60'8" x 22'4" x 13'1" 18500 x 6800 x 4000 mm
Working dimensions King-Pin:			50'4" x 19'7" x 12'6" 15350 x 5966 x 3800 mm	47'11" x 21'6" x 13'1" 14600 x 6560 x 4000 mm	52'6" x 21'6" x 13'1" 16000 x 6560 x 4000 mm	60'2" x 21'6" x 13'1" 18350 x 6560 x 4000 mm
Weight:	~ 11,000 lbs	~ 19,800 lbs	~ 38,000 lbs	~ 35,000 lbs	~ 40,000 lbs	~ 53,000 lbs
<b>Throughput (dependent on material)</b>						
Throughput performance:	to 65 yd <sup>3</sup> /h to 50 m <sup>3</sup> /h	to 90 yd <sup>3</sup> /h to 70 m <sup>3</sup> /h	to 230 yd <sup>3</sup> /h to 175 m <sup>3</sup> /h	to 220 yd <sup>3</sup> /h to 170 m <sup>3</sup> /h	to 290 yd <sup>3</sup> /h to 225 m <sup>3</sup> /h	to 360 yd <sup>3</sup> /h to 275 m <sup>3</sup> /h

**Options**

Conveyor extension, magnet drum, scraper for round brush, central lubrication, hopper pre-screening, hopper sensor controller, remote control, air suspension, feed device, attachment shoe, adjustable belt speed, noise insulation package and wind sifter

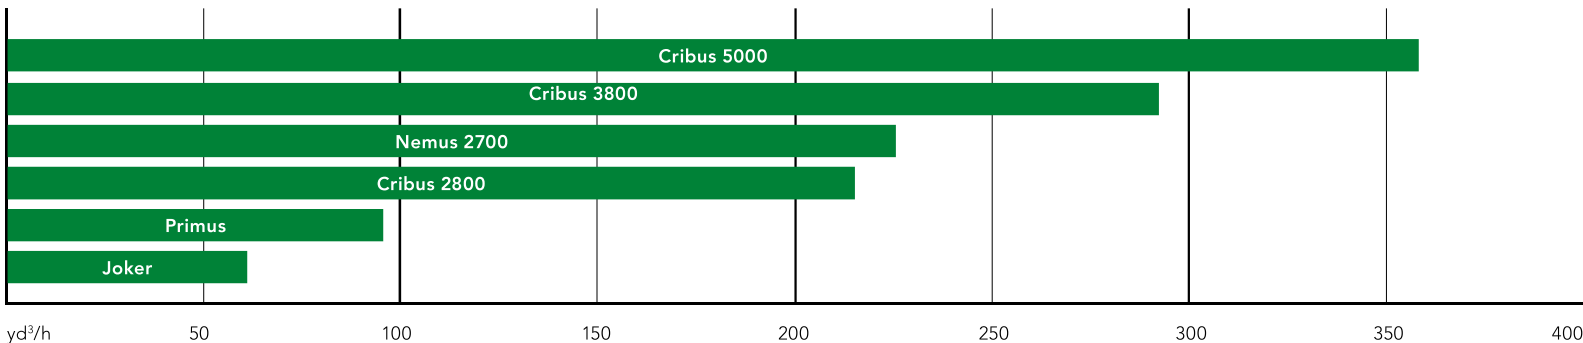

10855 DOVER STREET, STE. 1000  
WESTMINSTER, COLORADO 80021

[t] +1 (720) 890-9090  
[f] +1 (720) 890-5907  
[e] info@komptechamericas.com  
[w] www.komptechamericas.com



We reserve the right to make technical changes due to ongoing development. USA2017